


Philips  
S-video/stereo audio cable

1,5 m

SWV5555

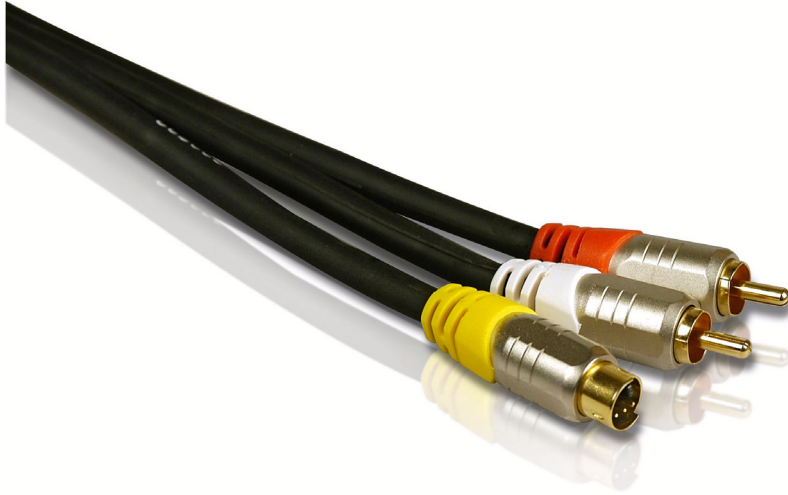

## Create a superior viewing experience

with this audio/video cable

Experience a new level of viewing while transferring audio/video signals between your components. Superior construction delivers improved picture and sound performance.

### Enjoy better picture quality

- 24 carat gold-plated connectors optimize signal

### Enjoy better audio quality

- Stranded conductor extends durability
- 4-Cut connectors for secure connections

### Protects against signal loss

- 100% aluminum shielding
- Oxygen-free copper conductor for ideal signal transfer
- Copper braided reinforced aluminum shielding

### Easy installation

- Color coded connectors for instant recognition
- Plug and play for easy use

### Enjoy extended durability

- Super pliable jackets for outstanding flexibility

**PHILIPS**  
sense and simplicity

S-video/stereo audio cable  
1,5 m

## Specifications

### Packaging Data

- Quantity: 1
- EAN/UPC/GTIN: 87 10895 93455 8
- Gross weight: .74 kg
- Tare weight: .13 kg
- Net weight: .61 kg
- Length: 265 mm
- Width: 195 mm
- Height: 100 mm

### Inner Carton

- EAN/UPC/GTIN: 87 10895 97054 9
- Quantity: 2
- Gross weight: 1.82 kg
- Tare weight: .6 kg

- Net weight: 1.22 kg
- Length: 280 mm
- Width: 175 mm
- Height: 210 mm

### Outer Carton

- EAN/UPC/GTIN: 87 10895 97055 6
- Quantity: 4
- Gross weight: 4.31 kg
- Tare weight: 1.87 kg
- Net weight: 2.44 kg
- Length: 370 mm
- Width: 300 mm
- Height: 230 mm

SWV5555/10

## Product highlights

### 24 carat gold-plated connector

24 carat gold-plated connectors ensure the best signal quality for your components.

### Stranded conductor

The stranded wire evenly distributes stress so no single area is overburdened. It provides more flexibility for easier positioning.

### 4-Cut connectors

4-Cut connectors ensure secure connections between your component and your cable.

### 100% aluminum shielding

This protective layer of aluminum guards against electromagnetic interference for improved signal quality.

### Twisted high purity OFC

This oxygen-free copper conductor provides the highest accuracy in signal transfer with minimal resistance.

### Braided shielding

Copper braided reinforced aluminum shielding protects against signal loss and interference.

### Color-coded connectors

Color coded connections make it easy to install your cable into the correct inputs and outputs

### Plug and play

Plug and play offers easy installation of components without time-consuming installations.

### Super pliable jackets

Super pliable PVC jackets are abrasion-resistant for outstanding flexibility and protection against everyday wear and tear.



Issue date 2008-11-15

Version: 2.0.5

12 NC: 9082 100 06363  
EAN: 87 10895 93461 9

© 2008 Koninklijke Philips Electronics N.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com](http://www.philips.com)